




VENTCAR 300

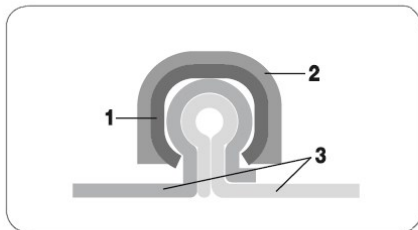

Exhaust gas hose for temperatures up to +300°C

Material

1. Clip profile spiral: hot-dip galvanised steel band
2. Protection profile
3. Wall: special coated textile high temperature fabric

- Technical hose must be adequately supplied with fresh air (min. 50%)
- The electrostatic charges are dissipated by earthing the spiral on both sides

Properties



- 60°C to + 300°C



compressable 1:4



highly flexible



clamp mechanism



RoHS compliant

Chemical resistance

- Look chemical resistance data sheet


Production standards

- Production lengths: from 3m to 10m
- Color: outer: green-brown, red protection profile inner: silver
- Available on request with stainless steel spirals

Connectors:



Car Clamp



Hose Connector



Hose Reducer

| DN (inner diameter) [mm] | Vacuum [mm H ₂ O] | Bend radius [mm*] | Weight [kg/m] |
|-----------------------------|---------------------------------|----------------------|------------------|
| 63 | 1700 | 38 | 0,45 |
| 75 | 1400 | 46 | 0,49 |
| 80 | 1250 | 48 | 0,51 |
| 100 | 800 | 60 | 0,64 |
| 125 | 500 | 75 | 0,79 |
| 150 | 360 | 90 | 1,23 |
| 200 | 200 | 140 | 1,67 |

* It applies to the inside of the bended hose.

Above data refer to ambient and medium temperature of 20°C. Products and technical data contained in this catalog are presented for informational purposes only, are subject to change without notice and should not be considered as a commercial offer.

Company **Mastervent** is not responsible for any errors or inaccuracies that may appear in the publication. The tolerance of inner diameter of the hose is from +1mm to +3mm depending on the diameter.